


Visual Level Indicators (VLI) Smart Line

Series	Type	Material	Pipe O.D. x s (mm)	Operating Pressure	Operating Temperature	Page
Smart Line 50	34000-A	316/316L	33.7*2.0	max. 50bar @ 20°C	-80°C ÷ +250°C	2
"	34000-B	"	"	"	"	3
"	34000-K	"	"	"	"	4
"	34000-O	"	"	"	"	5
Smart Line 50	34110-K	316/316L	33.7*2.0	max. 50bar @ 20°C	-80°C ÷ +250°C	6
"	34110-O	"	"	"	"	7
	Pressure Temperature Rating for Smart Line 50					8
	Float selection diagram for Smart Line 50					9
	Mounting specification for switches and transmitters drawing no. 20010501					10

Smart Line 50

Type: 34000-A

Design meets the requirements of PED 2014/68/EU and harmonized standards

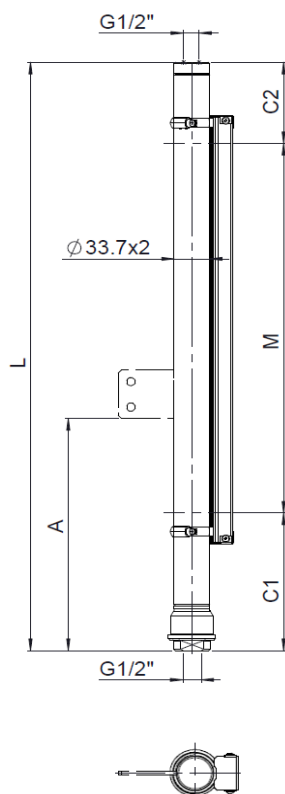

Purchase Order Data:

Company:

Purchase order no.:

Quantity:

Project:	
Tag no.:	

Operating Conditions

Fluid:

Density:

Viscosity:

Operating pressure:

Design pressure:

Operating temperature:

Design temperature:

Connecting Distance "L":

Fluid:	
Density:	0.55g/cm ³ g/cm ³ :
Viscosity:	150cSt cSt:
Operating pressure:	max. 50bar(g) @ 20°C *1) bar(g):
Design pressure:	" bar(g):
Operating temperature:	-80°C ... +250°C *1) °C:
Design temperature:	" °C:
Connecting Distance "L":	max. 5800mm (one-piece design) mm:

Design and Materials:

Float chamber:

Float:

316/316L

316L (Standard)

NBR

NBR

type no.: 34333 / 35615 / 48150/xx

type no.: 38578/0.6 / 0.8 / 0.9

type no.: 41622/1.0

other materials and densities see float selection diagram or on request

Damping spring top and bottom, 1.4310

No.: 30309

Gaskets:

Fibre compound Aramid/NBR (<150°C)

Standard

pure PTFE non reinforced (<250°C)

Graphite incl. reinforcing net in SS 316/316L (<400°C)

Process connections:

Connection threads:

- female G1/2" (ISO 7-1 / ISO 228-1), without plug

- other connection threads see price list

Standard

Float extension lower / upper:

Density in g/cm³: C1: C2:

SS 0.64 and <0.71 350 85

SS 0.71 and <0.8 250 85

SS 0.8 and <0.96 180 85

SS 0.96 140 85

NBR 0.55 100 85

C1 & C2 shorter or longer, if out of standard range or with damping springs

Indication Rail:

PC, IP65 (<150°C)

PC, IP68, inert gas (<150°C)

Al/PC, IP54 (<250°C)

Al/Glass, IP54 (<400°C)

316L, IP67 (<250°C)

316L, IP67 (<400°C)

Special execution

Flaps: red-silver

No.: 34837

Standard

Flaps: red-silver

No.: 41008

Flaps: red-silver

No.: 34560

Flaps: black-silver

No.: 37100

Flaps: red-silver

No.: 42403

Flaps: black-silver

No.: 42404

Flaps:

No.:

Accessories (refer to installation instructions 20010501)

Fixation bracket, moveable no. 45143-1:

Dim. "A" [mm]:

Magnetic switch:

Quantity:

Type:

Transmitter:

Resolution [mm]:

5 / 10

Type:

Electrical measuring length Mel [mm]:

Converter:

Type:

Additional accessories:

Test Reports and Certificates

EN10204:2004-3.1: main pressure-bearing parts according to PED

Special Executions & Additional Notes

Notes:


- *1) Refer to pressure-temperature rating! Lowest pressure-temperature rating of any connecting flange or fitting will set the limitation!
Test pressure will be specified according to WEKA specification AW 2.1.2.

All indicated dimensions in mm. All dimensions are only valid on VLI in standard execution.

Smart Line 50

Type: 34000-B

Design meets the requirements of PED 2014/68/EU and harmonized standards

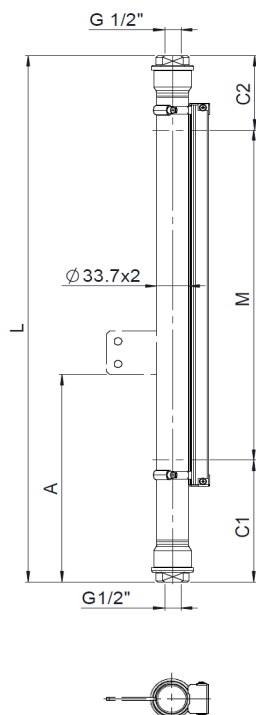

Purchase Order Data:

Company:

Purchase order no.:

Quantity:

Project:	
Tag no.:	

Operating Conditions

Fluid:

Density:

Viscosity:

Operating pressure:

Design pressure:

Operating temperature:

Design temperature:

Connecting Distance "L":

Fluid:	
Density:	0.55g/cm ³ g/cm ³ :
Viscosity:	150cSt cSt:
Operating pressure:	max. 50bar(g) @ 20°C *1) bar(g):
Design pressure:	" bar(g):
Operating temperature:	-80°C ... +250°C *1) °C:
Design temperature:	" °C:
Connecting Distance "L":	max. 5800mm (one-piece design) mm:

Design and Materials:

Float chamber:

Float:

316/316L

316L (Standard)

NBR

NBR

type no.:

type no.:

type no.:

34333 / 35615 / 48150/xx

38578/0.6 /0.8 /0.9

41622/1.0

other materials and densities see float selection diagram or on request

Damping spring top and bottom, 1.4310

No.: 30309

Gaskets:

Fibre compound Aramid/NBR (<150°C)

Standard

pure PTFE non reinforced (<250°C)

Graphite incl. reinforcing net in SS 316/316L (<400°C)

Process connections:

Connection threads:

- female G1/2" (ISO 7-1 / ISO 228-1), without plug

- other connection threads see price list

Standard

Float extension lower / upper:

Density in g/cm³: C1: C2:

SS 0.64 and <0.71 350 85

SS 0.71 and <0.8 250 85

SS 0.8 and <0.96 180 85

SS 0.96 140 85

NBR 0.55 100 85

C1 & C2 shorter or longer, if out of standard range or with damping springs

Indication Rail:

PC, IP65 (<150°C)

PC, IP68, inert gas (<150°C)

Al/PC, IP54 (<250°C)

Al/Glass, IP54 (<400°C)

316L, IP67 (<250°C)

316L, IP67 (<400°C)

Special execution

Flaps: red-silver

Flaps: red-silver

Flaps: red-silver

Flaps: black-silver

Flaps: red-silver

Flaps: black-silver

Flaps:

No.: 34837

No.: 41008

No.: 34560

No.: 37100

No.: 42403

No.: 42404

No.:

Standard

Accessories (refer to installation instructions 20010501)

Fixation bracket, moveable no. 45143-1:

Dim. "A" [mm]:

Magnetic switch:

Quantity:

Type:

Transmitter:

Resolution [mm]:

5 / 10

Type:

Electrical measuring length Mel [mm]:

Converter:

Type:

Additional accessories:

Test Reports and Certificates

EN10204:2004-3.1: main pressure-bearing parts according to PED

Special Executions & Additional Notes

Notes:



- *1) Refer to pressure-temperature rating! Lowest pressure-temperature rating of any connecting flange or fitting will set the limitation!
Test pressure will be specified according to WEKA specification AW 2.1.2.

All indicated dimensions in mm. All dimensions are only valid on VLI in standard execution.

Smart Line 50

Type: 34000-K

Design meets the requirements of PED 2014/68/EU and harmonized standards

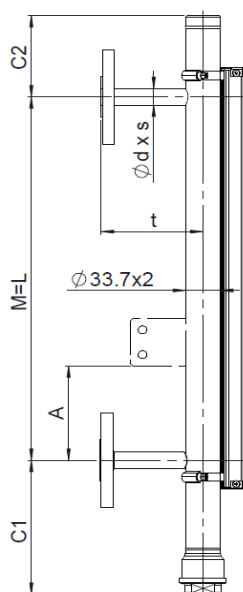

Float extension lower / upper:

Density in g/cm ³ :	C1:	C2:
SS Ø0.64 and <0.71	350	85
SS Ø0.71 and < 0.8	250	85
SS Ø0.8 and < 0.96	180	85
SS Ø0.96	140	85
NBR Ø0.55	100	85

C1 & C2 shorter or longer, if out of standard range or with damping springs

Standard flange connections:

	EN	ANSI/ISO
Connection pieces, d*s:		
DN15:	17.2*1.6	17.2*1.6
DN20:	17.2*1.6	17.2*1.6
DN25:	17.2*1.6	17.2*1.6
Ø DN32:	17.2*1.6	17.2*1.6
Dimension t:		
DN15:	100	100
DN20:	100	100
DN25:	100	100
Ø DN32:	tba on request ²⁾	

Purchase Order Data:

Company:
Purchase order no.:
Quantity:

Project:	
Tag no.:	

Operating Conditions

Fluid:	
Density:	0.55g/cm ³ g/cm ³ :
Viscosity:	150cSt cSt:
Operating pressure:	max. 50bar(g) @ 20°C ^{*1)} bar(g):
Design pressure:	" bar(g):
Operating temperature:	-80°C ... +250°C ^{*1)} °C:
Design temperature:	" °C:
Connecting Distance "L":	max. 5600mm (one-piece design) mm:

Design and Materials:

Float chamber:	316/316L	type no.:	34333 / 35615 / 48150/xx
Float:	316L (Standard)	type no.:	38578/0.6 / 0.8 / 0.9
	NBR	type no.:	41622/1.0
	NBR	type no.:	

other materials and densities see float selection diagram or on request

Damping spring top and bottom, 1.4310	No.: 30309	
Gaskets:	Fibre compound Aramid/NBR (<150°C)	Standard
	pure PTFE non reinforced (<250°C)	
	Graphite incl. reinforcing net in SS 316/316L (<400°C)	

Process connections:

EN-connecting flanges acc. EN1092-1 (Standard):	DN15:
- EN1092-1/01 B1/DNxx/PN40/316L	DN20:
- plate flanges, RF, Rz=12,5 ÷ 50µm, turning	DN25:

ANSI/class150 (= ISO/PN20) - connecting flanges:

- ANSI/ASME B16.5 / ISO-DIS7005-1.2, type 01/B1	ANSI 1/2" resp. ISO DN15 :
- plate flanges, RF SF, Rz=12,5 ÷ 50µm, turning	ANSI 3/4" resp. ISO DN20 :
	ANSI 1" resp. ISO DN25 :

ANSI/class300 (= ISO/PN50) - connecting flanges:

- ANSI/ASME B16.5 / ISO-DIS7005-1.2, type 01/B1	ANSI 1/2" resp. ISO DN15 :
- plate flanges, RF SF, Rz=12,5 ÷ 50µm, turning	ANSI 3/4" resp. ISO DN20 :
	ANSI 1" resp. ISO DN25 :

Other Connections

--

Indication Rail:

PC, IP65 (<150°C)	Flaps: red-silver	No.: 34837	Standard
PC, IP68, inert gas (<150°C)	Flaps: red-silver	No.: 41008	
Al/PC, IP54 (<250°C)	Flaps: red-silver	No.: 34560	
Al/Glass, IP54 (<400°C)	Flaps: black-silver	No.: 37100	
316L, IP67 (<250°C)	Flaps: red-silver	No.: 42403	
316L, IP67 (<400°C)	Flaps: black-silver	No.: 42404	
Special execution	Flaps:	No.:	

Accessories (refer to installation instructions 20010501)

Fixation bracket, moveable no. 45143-1:		Dim. "A" [mm]:	
Magnetic switch:	Quantity:	Type:	
Transmitter:	Resolution [mm]:	Type:	
Electrical measuring length Mel [mm]:			
Converter:	Type:		
Additional accessories:			

Test Reports and Certificates

EN10204:2004-3.1: main pressure-bearing parts according to PED	
--	--

Special Executions & Additional Notes

--

Notes:



- *1) Refer to pressure-temperature rating! Lowest pressure-temperature rating of any connecting flange or fitting will set the limitation!
Test pressure will be specified according to WEKA specification AW 2.1.2.
*2) In general also 100mm, depending on flange size

All indicated dimensions in mm. All dimensions are only valid on VLI in standard execution.

Smart Line 50

Type: 34000-O

Design meets the requirements of PED 2014/68/EU and harmonized standards

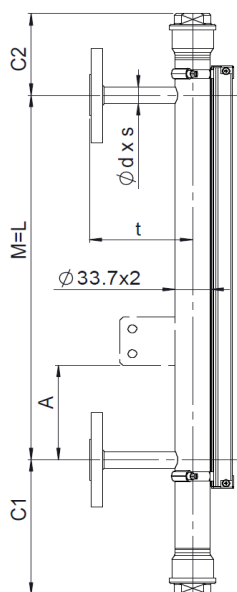

Float extension lower / upper:

Density in g/cm ³ :	C1:	C2:
SS Ø0.64 and <0.71	350	85
SS Ø0.71 and < 0.8	250	85
SS Ø0.8 and < 0.96	180	85
SS Ø0.96	140	85
NBR Ø0.55	100	85

C1 & C2 shorter or longer, if out of standard range or with damping springs

Standard flange connections:

	EN	ANSI/ISO
Connection pieces, d*s:		
DN15:	17.2*1.6	17.2*1.6
DN20:	17.2*1.6	17.2*1.6
DN25:	17.2*1.6	17.2*1.6
Ø DN32:	17.2*1.6	17.2*1.6
Dimension t:		
DN15:	100	100
DN20:	100	100
DN25:	100	100
Ø DN32:	tba on request ²⁾	

Purchase Order Data:

Company:

Purchase order no.:

Quantity:

Project:

Tag no.:

Operating Conditions

Fluid:

Density:

Viscosity:

Operating pressure:

Design pressure:

Operating temperature:

Design temperature:

Connecting Distance "L":

0.55g/cm³

0.150cSt

max. 50bar(g) @ 20°C ^{*1)}

"

-80°C ... +250°C ^{*1)}

"

max. 5600mm (one-piece design)

g/cm³:

cSt:

bar(g):

bar(g):

°C:

°C:

mm:

Design and Materials:

Float chamber:

Float:

316/316L

316L (Standard)

NBR

NBR

type no.: 34333 / 35615 / 48150/xx

type no.: 38578/0.6 / 0.8 / 0.9

type no.: 41622/1.0

other materials and densities see float selection diagram or on request

Damping spring top and bottom, 1.4310

No.: 30309

Gaskets:

Fibre compound Aramid/NBR (<150°C)

Standard

pure PTFE non reinforced (<250°C)

Graphite incl. reinforcing net in SS 316/316L (<400°C)

Process connections:

EN-connecting flanges acc. EN1092-1 (Standard):

- EN1092-1/01 B1/DNxx/PN40/316L

- plate flanges, RF, Rz=12,5 ÷ 50µm, turning

DN15:

DN20:

DN25:

ANSI/class150 (= ISO/PN20) - connecting flanges:

- ANSI/ASME B16.5 / ISO-DIS7005-1.2, type 01/B1

- plate flanges, RF SF, Rz=12,5 ÷ 50µm, turning

ANSI 1/2" resp. ISO DN15 :

ANSI 3/4" resp. ISO DN20 :

ANSI 1" resp. ISO DN25 :

ANSI/class300 (= ISO/PN50) - connecting flanges:

- ANSI/ASME B16.5 / ISO-DIS7005-1.2, type 01/B1

- plate flanges, RF SF, Rz=12,5 ÷ 50µm, turning

ANSI 1/2" resp. ISO DN15 :

ANSI 3/4" resp. ISO DN20 :

ANSI 1" resp. ISO DN25 :

Other Connections

Indication Rail:

PC, IP65 (<150°C)

PC, IP68, inert gas (<150°C)

Al/PC, IP54 (<250°C)

Al/Glass, IP54 (<400°C)

316L, IP67 (<250°C)

316L, IP67 (<400°C)

Special execution

Flaps: red-silver

Flaps: red-silver

Flaps: red-silver

Flaps: black-silver

Flaps: red-silver

Flaps: black-silver

Flaps:

No.: 34837

No.: 41008

No.: 34560

No.: 37100

No.: 42403

No.: 42404

No.:

Standard

Accessories (refer to installation instructions 20010501)

Fixation bracket, moveable no. 45143-1:

Dim. "A" [mm]:

Magnetic switch:

Quantity:

Type:

Transmitter:

Resolution [mm]:

Type:

Electrical measuring length Mel [mm]:

Converter:

Type:

Additional accessories:

Test Reports and Certificates

EN10204:2004-3.1: main pressure-bearing parts according to PED

Special Executions & Additional Notes

Notes:

*1) Refer to pressure-temperature rating! Lowest pressure-temperature rating of any connecting flange or fitting will set the limitation!

Test pressure will be specified according to WEKA specification AW 2.1.2.


*2) In general also 100mm, depending on flange size

All indicated dimensions in mm. All dimensions are only valid on VLI in standard execution.


Smart Line 50 with integrated valves

Type: 34110-K


Design meets the requirements of PED 2014/68/EU and harmonized standards

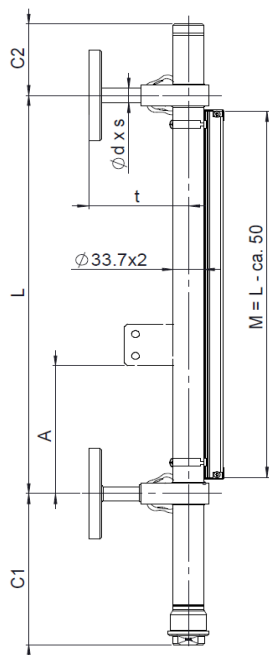

☐ Standard "right hand" type: 34110-K



☐ Optional "left hand" type: 34110-K (L)



Size of shut-off valve: DN6

Float extension lower / upper:

Density in g/cm ³ :	C1:	C2:
SS Ø0.64 and <0.71	350	85
SS Ø0.71 and < 0.8	250	85
SS Ø0.8 and < 0.96	180	85
SS Ø0.96	140	85
NBR Ø0.55	100	85

C1 & C2 shorter or longer, if out of standard range or with damping springs

Standard flange connections:

	EN	ANSI/ISO
Connection pieces, d*s:		
DN15:	17.2*1.6	17.2*1.6
DN20:	17.2*1.6	17.2*1.6
DN25:	17.2*1.6	17.2*1.6
Ø DN32:	17.2*1.6	17.2*1.6
Dimension t:		
DN15:	110	110
DN20:	110	110
DN25:	110	110
Ø DN32:	tba on request ²⁾	

Purchase Order Data:

Company:
Purchase order no.:
Quantity:

Project:	
Tag no.:	

Operating Conditions

Fluid:
Density: 0.55g/cm³ g/cm³:
Viscosity: 150cSt cSt:
Operating pressure: max. 50bar(g) @ 20°C ^{*1)} bar(g):
Design pressure: " bar(g):
Operating temperature: -80°C ... +250°C ^{*1)} °C:
Design temperature: " °C:
Connecting Distance "L": max. 5600mm (one-piece design) mm:

Design and Materials:

Float chamber: 316/316L Valves: 316L + pure PTFE
Float: 316L (Standard) type no.: 34333 / 35615 / 48150/xx
NBR type no.: 38578/0.6 / 0.8 / 0.9
NBR type no.: 41622/1.0

other materials and densities see float selection diagram or on request

Damping spring top and bottom, 1.4310 No.: 30309
Gaskets: Fibre compound Aramid/NBR (<150°C) Standard
pure PTFE non reinforced (<250°C)
Graphite incl. reinforcing net in SS 316/316L (<400°C)

Process connections:

EN-connecting flanges acc. EN1092-1 (Standard):

- EN1092-1/01 B1/DNxx/PN40/316L DN15:
- plate flanges, RF, Rz=12,5 ÷ 50µm, turning DN20:
DN25:

ANSI/class150 (= ISO/PN20) - connecting flanges:

- ANSI/ASME B16.5 / ISO-DIS7005-1.2, type 01/B1 ANSI 1/2" resp. ISO DN15 :
- plate flanges, RF SF, Rz=12,5 ÷ 50µm, turning ANSI 3/4" resp. ISO DN20 :
ANSI 1" resp. ISO DN25 :

ANSI/class300 (= ISO/PN50) - connecting flanges:

- ANSI/ASME B16.5 / ISO-DIS7005-1.2, type 01/B1 ANSI 1/2" resp. ISO DN15 :
- plate flanges, RF SF, Rz=12,5 ÷ 50µm, turning ANSI 3/4" resp. ISO DN20 :
ANSI 1" resp. ISO DN25 :

Other Connections

Indication Rail:

PC, IP65 (<150°C) Flaps: red-silver No.: 34837 Standard
PC, IP68, inert gas (<150°C) Flaps: red-silver No.: 41008
Al/PC, IP54 (<250°C) Flaps: red-silver No.: 34560
Al/Glass, IP54 (<400°C) Flaps: black-silver No.: 37100
316L, IP67 (<250°C) Flaps: red-silver No.: 42403
316L, IP67 (<400°C) Flaps: black-silver No.: 42404
Special execution Flaps: No.:

Accessories (refer to installation instructions 20010501)

Fixation bracket, moveable no. 45143-1: Dim. "A" [mm]:
Magnetic switch: Quantity: Type:
Transmitter: Resolution [mm]: 5 / 10 Type:
Electrical measuring length Mel [mm]:
Converter: Type:
Additional accessories:

Test Reports and Certificates

EN10204:2004-3.1: main pressure-bearing parts according to PED

Special Executions & Additional Notes

Notes:


- *1) Refer to pressure-temperature rating! Lowest pressure-temperature rating of any connecting flange or fitting will set the limitation!
Test pressure will be specified according to WEKA specification AW 2.1.2.
*2) In general also 100mm, depending on flange size

All indicated dimensions in mm. All dimensions are only valid on VLI in standard execution.


Smart Line 50 with integrated valves

Type: 34110-O


Design meets the requirements of PED 2014/68/EU and harmonized standards

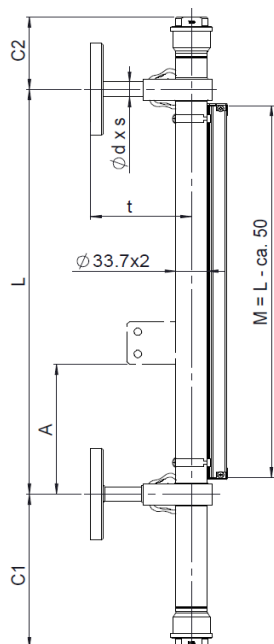

☐ Standard "right hand" type: 34110-O



☐ Optional "left hand" type: 34110-O (L)



Size of shut-off valve: DN6

Float extension lower / upper:

Density in g/cm ³ :	C1:	C2:
SS Ø0.64 and <0.71	350	85
SS Ø0.71 and < 0.8	250	85
SS Ø0.8 and < 0.96	180	85
SS Ø0.96	140	85
NBR Ø0.55	100	85

C1 & C2 shorter or longer, if out of standard range or with damping springs

Standard flange connections:

	EN	ANSI/ISO
Connection pieces, d*s:		
DN15:	17.2*1.6	17.2*1.6
DN20:	17.2*1.6	17.2*1.6
DN25:	17.2*1.6	17.2*1.6
Ø DN32:	17.2*1.6	17.2*1.6
Dimension t:		
DN15:	110	110
DN20:	110	110
DN25:	110	110
Ø DN32:	tba on request ²⁾	

Purchase Order Data:

Company:
Purchase order no.:
Quantity:

Project:	
Tag no.:	

Operating Conditions

Fluid:
Density: 0.55g/cm³ g/cm³:
Viscosity: 150cSt cSt:
Operating pressure: max. 50bar(g) @ 20°C ^{*1)} bar(g):
Design pressure: " bar(g):
Operating temperature: -80°C ... +250°C ^{*1)} °C:
Design temperature: " °C:
Connecting Distance "L": max. 5600mm (one-piece design) mm:

Design and Materials:

Float chamber: 316/316L Valves: 316L + pure PTFE
Float: 316L (Standard) type no.: 34333 / 35615 / 48150/xx
NBR type no.: 38578/0.6 / 0.8 / 0.9
NBR type no.: 41622/1.0

other materials and densities see float selection diagram or on request

Damping spring top and bottom, 1.4310 No.: 30309
Gaskets: Fibre compound Aramid/NBR (<150°C) Standard
pure PTFE non reinforced (<250°C)
Graphite incl. reinforcing net in ss 316/316L (<400°C)

Process connections:

EN-connecting flanges acc. EN1092-1 (Standard):

- EN1092-1/01 B1/DNxx/PN40/316L
- plate flanges, RF, Rz=12,5 ÷ 50µm, turning

DN15: ☐
DN20: ☐
DN25: ☐

ANSI/class150 (= ISO/PN20) - connecting flanges:

- ANSI/ASME B16.5 / ISO-DIS7005-1.2, type 01/B1
- plate flanges, RF SF, Rz=12,5 ÷ 50µm, turning

ANSI 1/2" resp. ISO DN15 : ☐
ANSI 3/4" resp. ISO DN20 : ☐
ANSI 1" resp. ISO DN25 : ☐

ANSI/class300 (= ISO/PN50) - connecting flanges:

- ANSI/ASME B16.5 / ISO-DIS7005-1.2, type 01/B1
- plate flanges, RF SF, Rz=12,5 ÷ 50µm, turning

ANSI 1/2" resp. ISO DN15 : ☐
ANSI 3/4" resp. ISO DN20 : ☐
ANSI 1" resp. ISO DN25 : ☐

Other Connections

--

Indication Rail:

PC, IP65 (<150°C)
PC, IP68, inert gas (<150°C)
Al/PC, IP54 (<250°C)
Al/Glass, IP54 (<400°C)
316L, IP67 (<250°C)
316L, IP67 (<400°C)
Special execution

Flaps: red-silver No.: 34837 Standard ☐
Flaps: red-silver No.: 41008 ☐
Flaps: red-silver No.: 34560 ☐
Flaps: black-silver No.: 37100 ☐
Flaps: red-silver No.: 42403 ☐
Flaps: black-silver No.: 42404 ☐
Flaps: No.:

Accessories (refer to installation instructions 20010501)

Fixation bracket, moveable no. 45143-1: Dim. "A" [mm]:
Magnetic switch: Quantity: Type:
Transmitter: Resolution [mm]: 5 / 10 Type:
Electrical measuring length Mel [mm]:
Converter: Type:
Additional accessories:

Test Reports and Certificates

EN10204:2004-3.1: main pressure-bearing parts according to PED ☐

Special Executions & Additional Notes

--


Notes:

- *1) Refer to pressure-temperature rating! Lowest pressure-temperature rating of any connecting flange or fitting will set the limitation!
Test pressure will be specified according to WEKA specification AW 2.1.2.
*2) In general also 100mm, depending on flange size

All indicated dimensions in mm. All dimensions are only valid on VLI in standard execution.

Pressure-temperature-rating for VLI Smart Line 50, type 34000 & 34110


Max. 50bar(g) @ 20°C, up to max. 250°C for VLI bypass float chamber in SS EN 1.4401, 1.4436 / 1.4404, 1.4435 resp. A NSI 316/316L

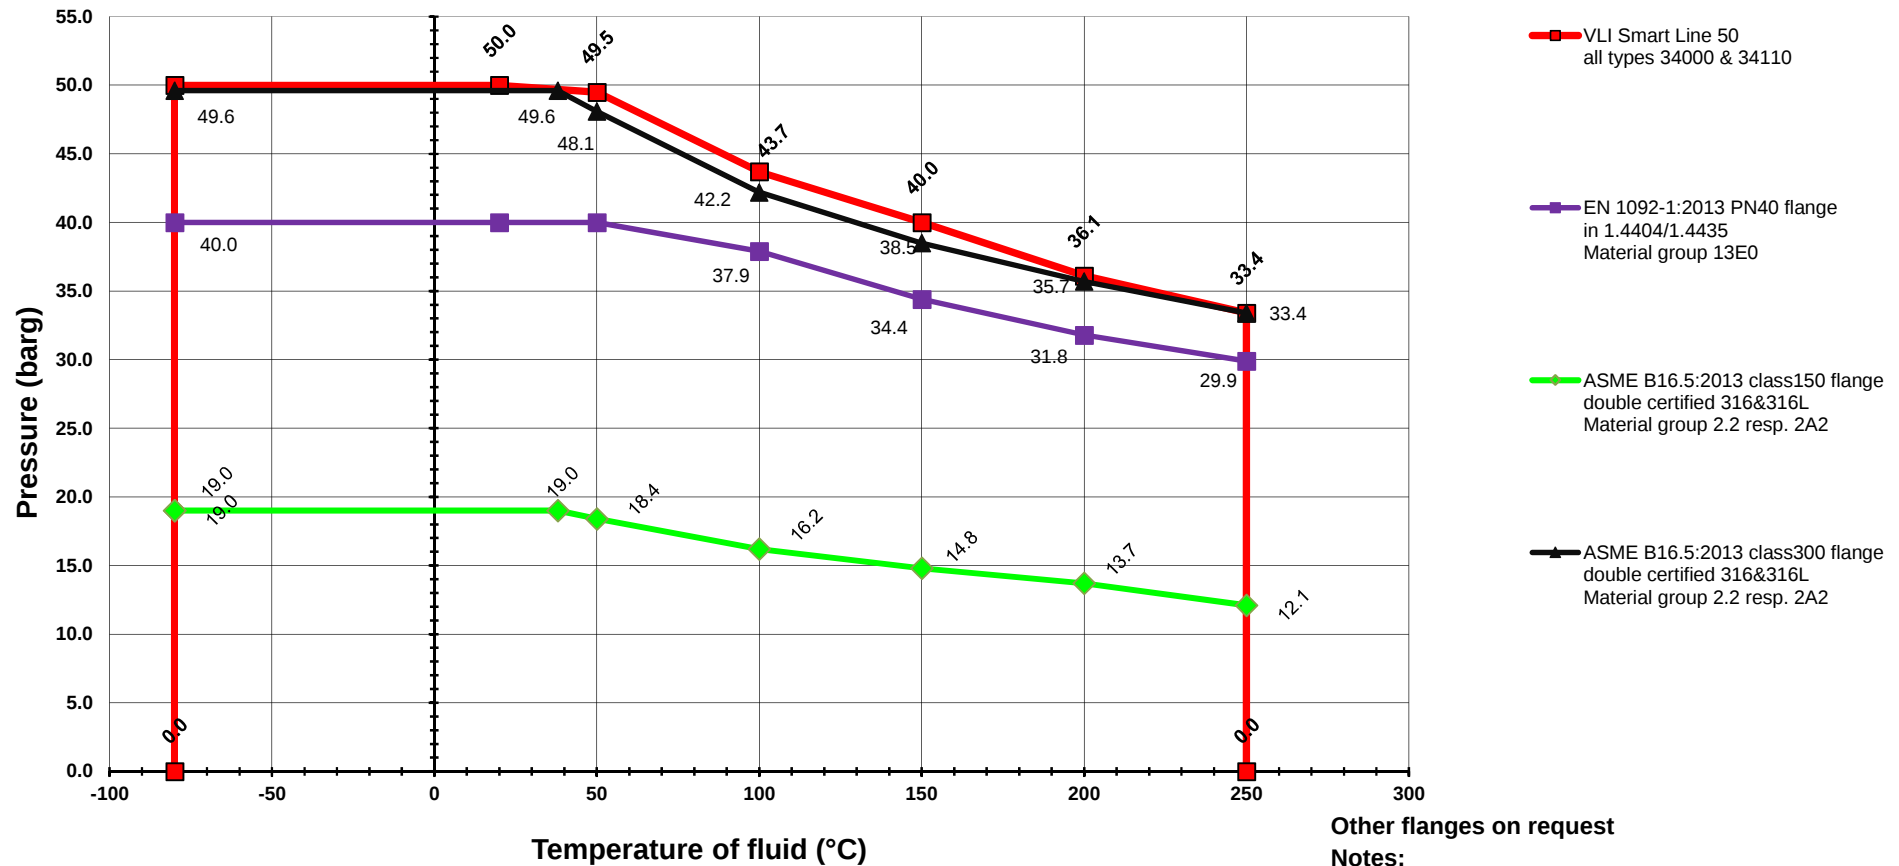

Other flanges on request

Notes:


- EN1092-1:2013 flange PN10 and PN16 up to DN150 use identical interface dimensions
- EN1092-1:2013 flange PN25 and PN40 up to DN150 use identical interface dimensions
- Tolerated max. pressure @ specified temperature of the VLI is given either by the bypass tube or by the connection flange
- Lower value sets the limitation! ---

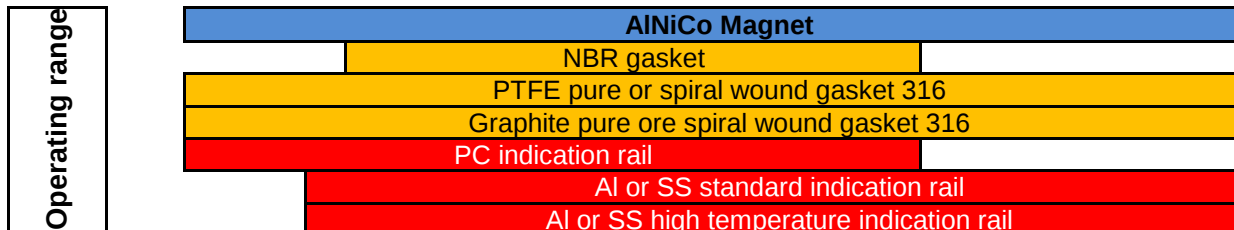

Float selection diagram VLI Typ 34000/34110, Smart Line 50

These data apply for an operating temperature of $\hat{O}20^{\circ}\text{C}$.

For higher operating temperatures, please check the max. permissible float pressure on the respective data sheet.

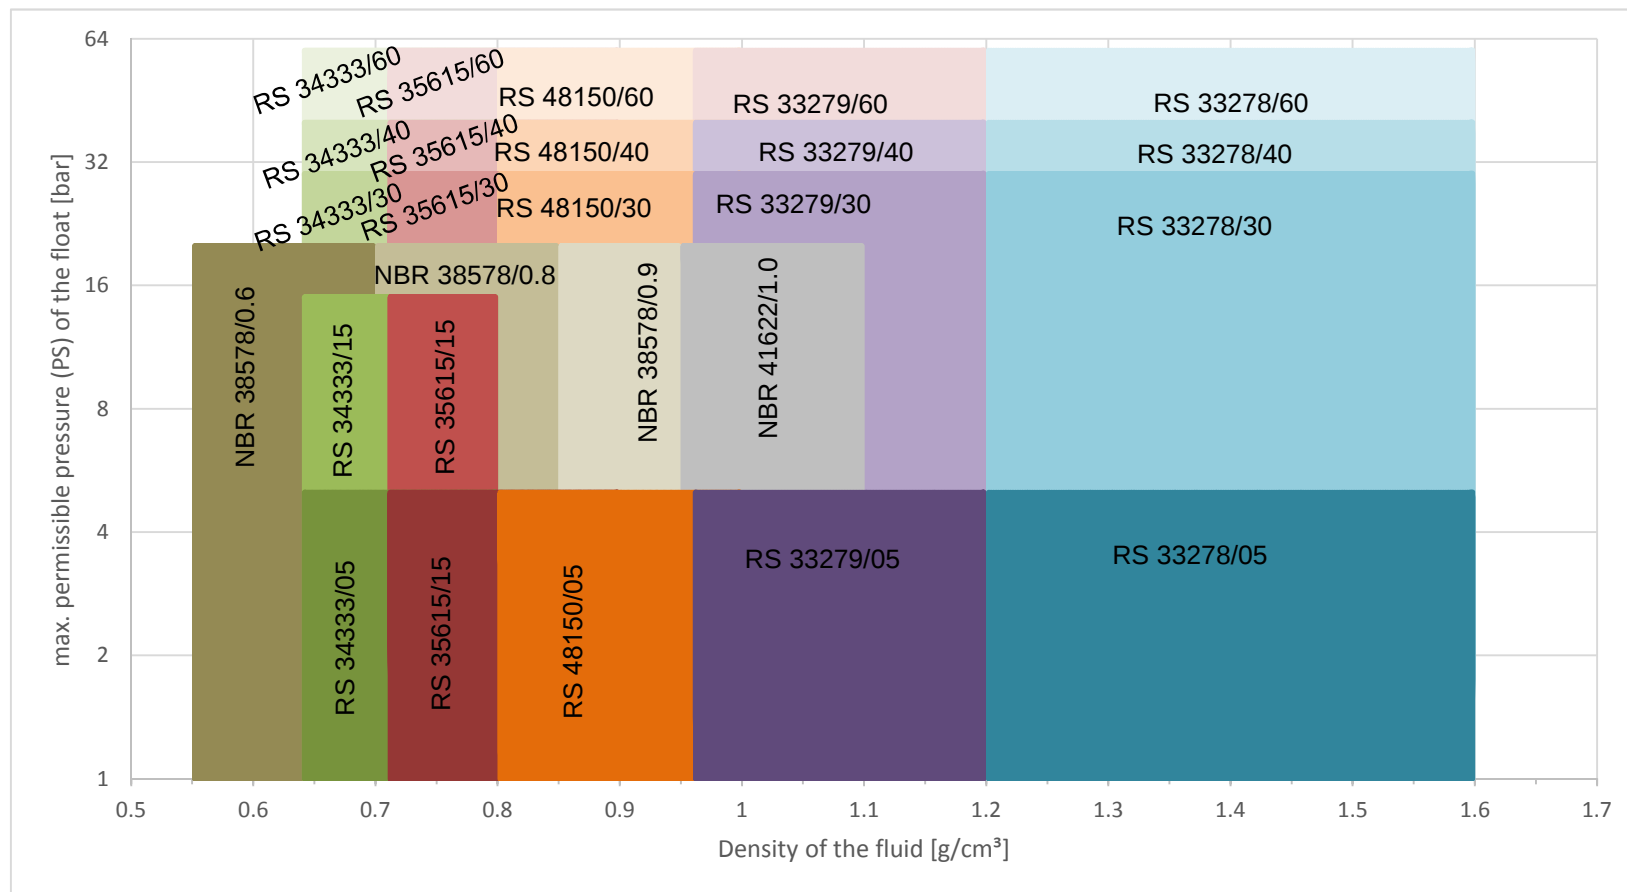

Limit of application:
VLI @ 20°C
Observe P-T diagram!

Comments:

RS = casing float

NBR = foamed plastic float

Interior diameter of the float chamber = 29.7mm

For steam or condensate applications, please check the use of damping springs

Additional charge for densities $< 0.8\text{g/cm}^3$ due to extended length of bottom float run-out

Example 34333/XX = max. permissible pressure in bar @ 20°C

Example 38578/X.X = density range of the floats in g/cm^3

Material = 316L

Material = NBR

Attention: Check media compatibility

Mounting

Normal: Valid is the indicated switching function on the type label (float below switch)

Installation 180 °C opposite of the indication rail with the permitted tolerance according to the tube diameter


Cable exit downwards

Variation: Each of the following variants leads to a reversion of the indicated switching logic:


Mounting with cable exit upwards

Mounting adjacent to the indication rail

34000

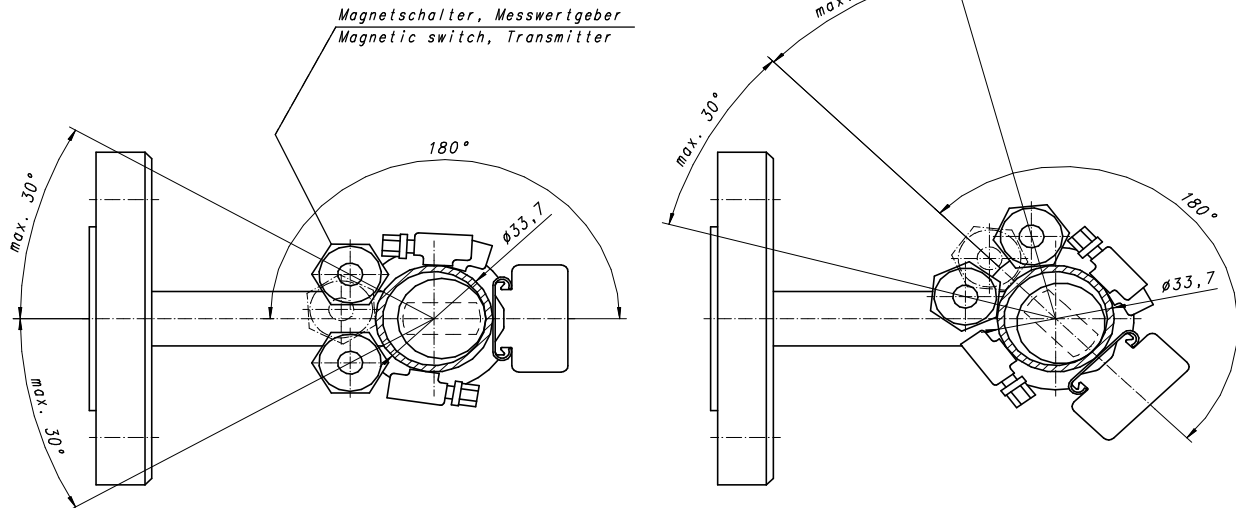

23614, 34300, 32755

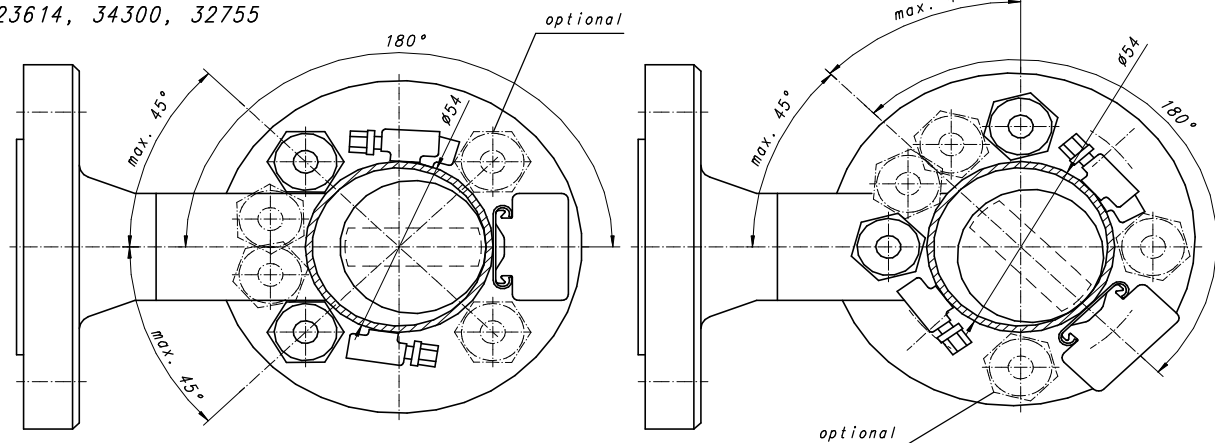

34110

